

# RubberBond™

## ELEVATE

A revolutionary unitary surface with optimal safety ratings, and ultra-vibrant EPDM colors.


FALL PROTECTION

UNDER  
**400**  
**HIC**  
at 12 feet


### key features:

- 1 1/2" wear course
- 5" overall thickness
- 400 HIC rating\*
- 16" fall height rating\*
- 15lbs weight per square foot


\*Averages noted, independently lab tested and certified.  
Lower HIC rating = superior safety.

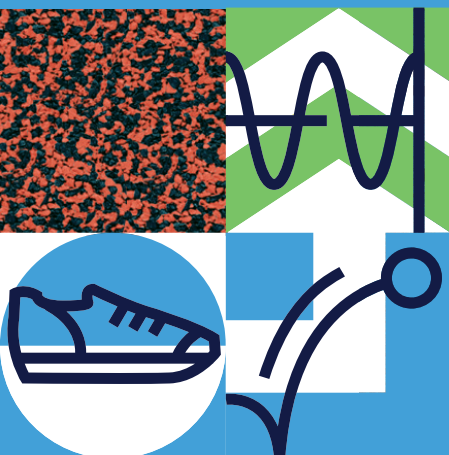


available in these standard colors:




green



light blue




dark blue




terra cotta



brown




yellow



dark green

## elevating safe play surfaces to the highest level

This revolutionary hybrid bi-layer system combines the superior safety ratings of a loose-fill system, with the accessibility, durability and design options of a unitary system. RubberBond Elevate features a vibrant, brightly colored EPDM particulate blend that stays colorfast for years. Easily installs over a variety of substrates, saving on costly concrete or asphalt sub-bases.

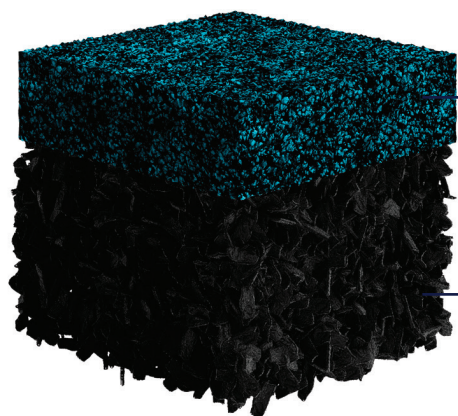

### unitary bonded 1.5" EPDM top layer

vivid and durable EPDM material is poured in place

### 3.5" rubber mulch under-layer

maximum shock-absorption, performs over uneven terrain

RubberBond™  
CLASSIC

RubberBond™  
ELEVATE

Traditional  
Poured-in-Place

	RubberBond™ CLASSIC	RubberBond™ ELEVATE	Traditional Poured-in-Place
WEAR COURSE	1 1/2"	1 1/2"	3/8 - 1/2"
OVERALL THICKNESS	5"	5"	2 - 3 1/2"
AVERAGE HIC RATING	300	400	800+
FALL HEIGHT RATING	16"	16"	6 - 8"
WEIGHT PER SQ. FT.	15 lbs	15 lbs	5 - 7 lbs